


Little Rock
1-800-945-5542
Baton Rouge
1-888-754-5707
Houston
1-888-388-6280

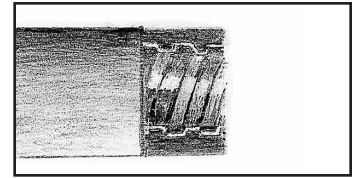

UALT

UL Listed Liquid-Tight Flexible Conduit

Application: UALT gives protection for wiring circuits located in extremely wet or damp areas. Also suitable for machines and equipment where ruggedness is required. Now in use on presses, welders, pumps, blowers, grinders, conveyors, automated lines, etc.

Description: Galvanized steel core for lasting mechanical protection. Durable, abrasion resistant PVC jacket will not wrinkle or shrink from cut ends. Exceptional crush proof qualities. Smooth interior for easy wire pull thru. Complete protection against liquid and moisture vapor. Sequentially marked in feet for easy measurement.

Specifications:

- Rated for 60°, Resists sunlight, heat, oil, and chemical degradation.
- Accepts standard UL Listed liquid tight connectors.
- $\frac{3}{8}$ " thru $1\frac{1}{4}$ " armor is approved as an equipment ground.
- Superior protection in hostile environment.
- Complies with UL standards 360, File Number E34028, CSA C22.2 File Number LL21229-4, NEC 351.
- Flame Test Rating of FT-4 per CSA, C22.2
- NEC Article 500 Class I, Division 2; Classes II and III.

| Catalog No. | Description | Internal Diameter | | External Diameter | | Bending Radius | Weight per per 100 ft. |
|-------------|------------------------|-------------------|--------|-------------------|--------|--------------------|------------------------|
| | | Min | Max | Min | Max | | |
| P01A12 | UALT $\frac{3}{8}$ " | .484" | .504" | .690" | .710" | 2" | 22 |
| P02A12 | UALT $\frac{1}{2}$ " | .622" | .642" | .820" | .840" | 3 $\frac{1}{4}$ " | 25 |
| P03A12 | UALT $\frac{3}{4}$ " | .820" | .840" | 1.030" | 1.050" | 4 $\frac{1}{4}$ " | 34 |
| P04A12 | UALT 1" | 1.041" | 1.066" | 1.290" | 1.315" | 6 $\frac{1}{2}$ " | 64 |
| P05A12 | UALT 1 $\frac{1}{4}$ " | 1.380" | 1.410" | 1.630" | 1.660" | 8" | 84 |
| P06A12 | UALT 1 $\frac{1}{2}$ " | 1.575" | 1.600" | 1.865" | 1.900" | 9" | 102 |
| P07A12 | UALT 2" | 2.020" | 2.045" | 2.340" | 2.375" | 11" | 148 |
| P08A12 | UALT 2 $\frac{1}{2}$ " | 2.480" | 2.505" | 2.840" | 2.875" | 14" | 174 |
| P09A12 | UALT 3" | 3.070" | 3.100" | 3.460" | 3.500" | 17 $\frac{1}{2}$ " | 290 |
| P10A12 | UALT 3 $\frac{1}{2}$ " | 3.500" | 3.540" | 3.960" | 4.000" | 20" | 385 |
| P11A12 | UALT 4" | 4.000" | 4.040" | 4.460" | 4.500" | 24" | 426 |

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003