


Little Rock
1-800-945-5542
Baton Rouge
1-888-754-5707
Houston
1-888-388-6280

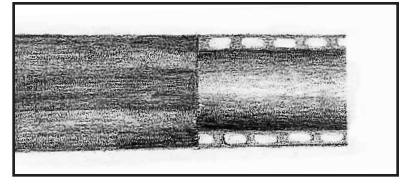

NMLT

Non-Metallic Liquid-Tight

Application: NMLT is designed for liquid tight applications which are subject to vibration, movement, oil, and corrosives. Suitable for indoor and outdoor use such as indoor lighting, water treatment systems, and HVAC equipment.

Specifications: • UL listed for direct burial applications • UL listed per UL Standard for Safety 1660; UL File Number E211327 • Conforms to the provisions of Article 351 of the NEC • Sunlight resistant UL compound PVC Jacket • Temperature Range: 80°C dry and 60°C, wet to -34°C. +70° C. Oil Resistant. • Can be used for lengths of over 6 feet per 1993 NEC.

Catalog No.	Trade Size	Lengths	Approximate Weight per 100 ft.	Inside Diameter		Outside Diameter	
				Min.	Max.	Min.	Max.
P01A14	NMLT 3/8"	100 ft.	12.8	.484"	.494"	.690"	.710"
P02A14	NMLT 1/2"	100/1000 ft.	13.3	.622"	.632"	.820"	.840"
P03A14	NMLT 3/4"	100 ft.	16.3	.820"	.830"	1.030"	1.050"
P04A14	NMLT 1"	100 ft.	25.9	1.040"	1.050"	1.290"	1.315"
P05A14	NMLT 1 1/4"	50 ft.	33.9	1.380"	1.390"	1.630"	1.660"
P06A14	NMLT 1 1/2"	50 ft.	44.6	1.575"	1.585"	1.865"	1.900"
P07A14	NMLT 2"	50 ft.	61.7	2.020"	2.030"	2.340"	2.375"

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003