

Little Rock
800-945-5542


Virginia Beach
757-361-0207

Baton Rouge
888-754-5707

Las Vegas
702-696-0001

Houston
888-388-6280

Kentucky
859-727-6100

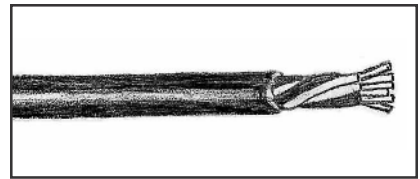

THERMOSTAT WIRE

18 AWG PLENUM Jacketed

Application: For use in overhead plenums without conduit.

Specifications: • Meets UL 13 and UL1581 Article 725, UL CL2P • Conductor: 2 or more solid bare copper conductors • Insulation: PVC 2000 psi min. • Jacketing: White PVC 2500 psi min • Temperature Rating: -20°C to +60°C • Color Code Chart Below

Catalog No.	Description	AWG	No. of Conductors	Construction	Weight per 1000'	Wall Thickness		Nominal Overall Diameter
						Insulation	Jacket	
P01D4	18 - 2 Cond. WH JKT PLN	18	2	Cabled	16	.007	.014	.138
P02D4	18 - 3 Cond. WH JKT PLN	18	3	Cabled	22	.007	.014	.147
P03D4	18 - 4 Cond. WH JKT PLN	18	4	Cabled	30	.007	.014	.161
P04D4	18 - 5 Cond. WH JKT PLN	18	5	Cabled	35	.007	.014	.177
P05D4	18 - 6 Cond. WH JKT PLN	18	6	Cabled	41	.007	.014	.193
P06D4	18 - 8 Cond. WH JKT PLN	18	8	Cabled	53	.007	.014	.210
P07D4	18 - 10 Cond. WH JKT PLN	18	10	Cabled	65	.007	.014	.227

* Standard Packaging: 2 and 3 conductors: 4 x 500' spools per case
4 - 10 conductors: 4 x 250' spools per case

THERMOSTAT COLOR CODE CHART

Conductor	Color
2	Red, White
3	Red, White, Green
4	Red, White, Green, Blue
5	Red, White, Green, Blue, Yellow
6	Red, White, Green, Blue, Yellow, Tan
7	Red, White, Green, Blue, Yellow, Tan, Orange
8	Red, White, Green, Blue, Yellow, Tan, Orange, Black
9	Red, White, Green, Blue, Yellow, Tan, Orange, Black, Pink
10	Red, White, Green, Blue, Yellow, Tan, Orange, Black, Pink, Brown
12	Red, White, Green, Blue, Yellow, Tan, Orange, Black, Pink, Brown, Gray, Purple

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003