

**Little Rock**  
800-945-5542


**Virginia Beach**  
757-361-0207

**Baton Rouge**  
888-754-5707

**Las Vegas**  
702-696-0001

**Houston**  
888-388-6280

**Kentucky**  
859-727-6100

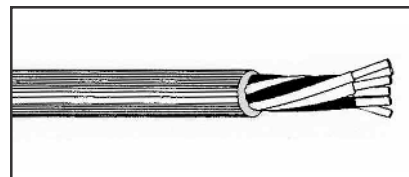

## TELEPHONE STATION WIRE

### 22 and 24 AWG

**Application:** Used for single line phone systems, speaker extensions, and security alarms. 22 AWG for long runs (100 ft. +), 24 AWG for short runs.

**Specifications:** • Conductor: Soft drawn, solid bare copper, ASTM B-3 • Insulation: Semi-rigid PVC, 2000 psi min.  
• Jacket: PVC tubed jacket 2500 psi min. • Jacket Color: Beige, Gray, or White • Temperature Range: -20°C to + 60°C

Color Code: Red, Green, Yellow, Black

Catalog No.	Description	Construction	Weight	Wall Thickness		Nominal Overall Diameter
				Insulation	Jacket	
P01E1	22 Solid AWG 4 Conductor Station BE	Parallel	12lbs/mft	.006	.013	.115
P02E1	22 Solid AWG 4 Conductor Station GY	Parallel	12lbs/mft	.006	.013	.115
P03E1	22 Solid AWG 4 Conductor Station WH	Parallel	12lbs/mft	.006	.013	.115
P04E1	24 Solid AWG 4 Conductor Station BE	Parallel	9 lbs/mft	.006	.013	.103
P05E1	24 Solid AWG 4 Conductor Station GY	Parallel	9 lbs/mft	.006	.013	.103
P06E1	24 Solid AWG 4 Conductor Station WH	Parallel	9 lbs/mft	.006	.013	.103

\* Standard Packaging: 1000 ft. Cartons, 1000 ft Reels, 500 ft. Cartons

**1-800-945-5542**

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003