

Little Rock
800-945-5542


Virginia Beach
757-361-0207

Baton Rouge
888-754-5707

Las Vegas
702-696-0001

Houston
888-388-6280

Kentucky
859-727-6100

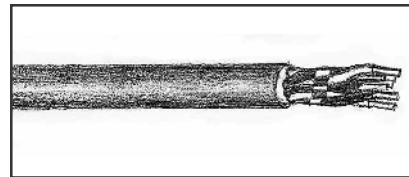

TELEPHONE INSIDE WIRE CATEGORY 2

22 AWG

Application: Used for telephone systems, intercom systems, speaker extensions, and multiline telephone installations.

Specifications:

- Conductor: Solid bare copper, ASTM B-3, AWG 22
- Conductor Resistance: 18.0 ohms/KFT max.
- Insulation: 3000 psi min.
- Insulation Resistance: 500 megohms/KFT min.
- Jacketing: Beige 2500 psi min.
- Temperature Range: -20°C to + 60°C
- PVC + PVC 300V 60°C
- UL CMR, NEC Article 800, Riser Rated, meets UL 444 and CAT 2 Performance Level
- High Voltage: 2500 VDC
- Mutual Capacitance: 45.0 NF/KFT max.
- Color Code Chart page 35

Catalog No.	Description	Construction	Weight	Wall Thickness		Nominal Overall Diameter
				Insulation	Jacket	
P01E2	22 AWG 2 Pair CAT 2 Beige	Twisted	13 lbs/mft	.006	.013	.150
P02E2	22 AWG 3 Pair CAT 2 Beige	Twisted	18 lbs/mft	.006	.013	.175
P03E2	22 AWG 4 Pair CAT 2 Beige	Twisted	23 lbs/mft	.006	.013	.197
P04E2	22 AWG 6 Pair CAT 2 Beige	Twisted	33 lbs/mft	.006	.013	.231
P05E2	22 AWG 12 Pair CAT 2 Beige	Twisted	61 lbs/mft	.006	.013	.303
P06E2	22 AWG 25 Pair CAT 2 Beige	Twisted	126 lbs/mft	.006	.013	.415

* Standard Packaging: 1000 ft. Cartons

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003