


Little Rock **Virginia Beach**
800-945-5542 757-361-0207

Baton Rouge **Las Vegas**
888-754-5707 702-696-0001

Houston **Kentucky**
888-388-6280 859-727-6100

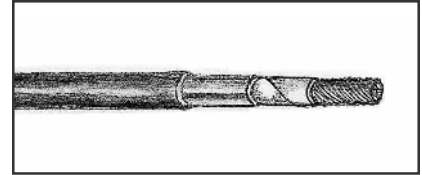

TGGT APPARATUS & MOTOR LEAD WIRE Single Conductor 600 Volt 250°C UL®

Description: • 27 % nickel coated copper conductors, Flexible stranded per ASTM B355, B8, B174, and B173. • Sizes 24 AWG - 1000 MCM. • Insulation consists of PTFE Teflon® Tapes with fiberglass wrap and an overall jacket of a braided glass, impregnated with moisture, heat, flame resistant compound.

Application: For use in internal wiring of domestic, commercial, and industrial heating and cooking equipment in both damp and dry applications.

Catalog	Size AWG	No. of Strands	TFE Wall Thickness	Double Fiberglass Wrap Thickness	Fiberglass Braid Thickness	Overall Diameter	Net Weight
P01J3	18	16	.015"	.010"	.005"	.11"	13 lbs/mft
P02J3	16	26	.015"	.010"	.005"	.12"	18 lbs/mft
P03J3	14	41	.015"	.010"	.005"	.14"	24 lbs/mft
P04J3	12	65	.015"	.015"	.010"	.16"	34 lbs/mft
P05J3	10	105	.015"	.015"	.005"	.19"	51 lbs/mft
P06J3	8	133	.015"	.015"	.005"	.23"	65 lbs/mft
P07J3	6	133	.020"	.015"	.007"	.30"	114 lbs/mft
P08J3	4	133	.020"	.015"	.007"	.35"	168 lbs/mft
P09J3	2	133	.020"	.015"	.007"	.42"	246 lbs/mft
P10J3	1/0	259	.035"	.020"	.010"	.54"	399 lbs/mft
P11J3	2/0	259	.035"	.020"	.010"	.60"	493 lbs/mft
P12J3	4/0	259	.035"	.020"	.010"	.72"	762 lbs/mft

* Shipping Tolerances +/-10%

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003