


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

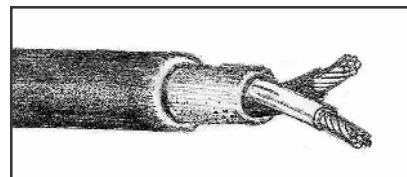

TYPE SJOOW PORTABLE CORD 90° 300 Volt UL/CSA

Application: Use for portable tools, equipment, appliances, small motors and associated machinery. Suitable for use in conditions where the cord is not subject to acid, grease, oil, or solvents. **Specifications:** • **Conductors:** Fully annealed, stranded bare copper, per ASTM B-174, sizes 18 - 10 AWG • **Insulation:** Premium grade color coded SBR rubber • **Jacket:** CPE, black
• **Temperature Rating:** -40°C to + 90°C • Good flexibility in low temperatures • UL Flexible Cord Subject 62 and CSA Flexible Cord C22.2-49 • OSHA acceptable, JC 580

Color Code:	No. of Conductors	Color
	2	Black, White
	3	Black, White, Green
	4	Black, White, Red, Green

Catalog No.	No. of Conductors	AWG	Conductor Strand	Nominal Insulation Thickness		Nominal Overall Diameter		Current Amps	Weight LBS/M'
				Inches	mm	Inches	mm		
P01M2	2	18	16/30	.030	.76	.295	7.49	10	54
P02M2	3	18	16/30	.030	.76	.320	8.13	10	70
P03M2	4	18	16/30	.030	.76	.355	9.02	7	92
P04M2	2	16	26/30	.030	.76	.320	8.13	13	66
P05M2	3	16	26/30	.030	.76	.345	8.76	13	89
P06M2	4	16	26/30	.030	.76	.385	9.78	10	112
P07M2	2	14	41/30	.030	.76	.360	9.14	18	87
P08M2	3	14	41/30	.030	.76	.380	9.65	18	106
P09M2	4	14	41/30	.030	.76	.415	10.54	15	144
P10M2	2	12	65/30	.030	.76	.425	10.80	25	138
P11M2	3	12	65/30	.030	.76	.450	11.43	25	173
P12M2	4	12	65/30	.030	.76	.500	12.70	20	214
P13M2	2	10	104/30	.045	1.14	.560	14.22	30	219
P14M2	3	10	104/30	.045	1.14	.600	15.24	30	250
P15M2	4	10	104/30	.045	1.14	.680	17.27	25	320

* Standard Packaging: 250 ft., 500 ft., 1000 ft.

** Other put ups available on special order.

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 1999 PWC09/01