


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

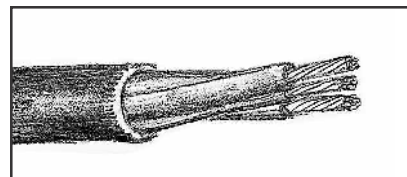

TYPES SJEOW/SEOW AND CSA TYPES SJTW/STW PORTABLE CORD 105°C 300 and 600 Volt UL

Application: For use with portable tools and lighting, office equipment, fans, and floor care equipment.

Specifications: Fully annealed, stranded bare copper, per ASTM B-174, sizes 18 - 4AWG

- **Insulation:** Class 36 Thermoplastic Elastomer • **Jacket:** Class 36 Thermoplastic Elastomer, black
- **Temperature Rating:** -50°C to + 105°C • Water resistant and an oil resistant jacket • Lightweight and non-marking
- Excellent molding characteristics • Very good flexibility • UL Listed and CSA certified for indoor and outdoor use (18 - 10 AWG)
- UL Flexible Cord Subject 62 • CSA certified, MSHA approval • 8, 6, 4 AWG not UL or CSA (pending MSHA approval)

Color Code:	No. of Conductors	Color
	2	Black, White
	3	Black, White, Green
	4	Black, White, Red, Green

Catalog No.	No. of Conductors	AWG	Conductor Strand	Nominal Insulation Thickness		Nominal Overall Diameter		Current Amps	Weight LBS/M'
				Inches	mm	Inches	mm		
UL Type SJEOW CSA Type SJTW - 300 Volt									
P01M5	2	18	16/30	.030	.760	.290	7.370	10	43
P02M5	3	18	16/30	.030	.760	.310	7.870	10	59
P03M5	4	18	16/30	.030	.760	.330	8.380	7	73
P04M5	2	16	26/30	.030	.760	.305	7.750	13	61
P05M5	3	16	26/30	.030	.760	.330	8.380	13	78
P06M5	4	16	26/30	.030	.760	.385	9.780	10	89
P07M5	2	14	41/30	.030	.760	.345	8.760	18	75
P08M5	3	14	41/30	.030	.760	.365	9.270	18	101
P09M5	4	14	41/30	.030	.760	.415	10.540	15	115
P10M5	3	12	65/30	.030	.760	.430	10.920	30	159
P11M5	4	12	65/30	.030	.760	.480	12.190	25	200
UL Type SEOW CSA Type STW - 600 Volt									
P12M5	2	18	16/30	.030	.760	.350	8.890	10	51
P13M5	3	18	16/30	.030	.760	.375	9.530	10	75
P14M5	4	18	16/30	.030	.760	.400	10.160	7	87
P15M5	2	16	26/30	.030	.760	.370	9.400	13	73
P16M5	3	16	26/30	.030	.760	.400	10.160	13	89
P17M5	4	16	26/30	.030	.760	.420	10.670	10	105
P18M5	5	16	26/30	.030	.760	.500	12.700	8	125
P19M5	2	14	41/30	.045	1.140	.505	12.830	18	128
P20M5	3	14	41/30	.045	1.140	.530	13.460	18	153
P21M5	4	14	41/30	.045	1.140	.580	14.730	15	180
P22M5	2	12	65/30	.045	1.140	.580	14.730	25	170
P23M5	3	12	65/30	.045	1.140	.610	15.490	25	201
P24M5	4	12	65/30	.045	1.140	.660	16.760	20	255
P25M5	5	12	65/30	.045	1.140	.715	18.160	16	285
P26M5	2	10	104/30	.045	1.140	.625	15.880	30	212
P27M5	3	10	104/30	.045	1.140	.655	16.640	30	267
P28M5	4	10	104/30	.045	1.140	.725	18.420	25	325
P29M5	5	10	104/30	.045	1.140	.775	19.690	24	385
P30M5	3	8	65/26	.060	1.520	.820	20.830	40	383
P31M5	4	8	65/26	.060	1.520	.930	23.620	35	511
P32M5	3	6	133/27	.060	1.520	.990	25.150	55	550
P33M5	4	6	133/27	.060	1.520	1.105	28.070	45	657
P34M5	3	4	259/28	.060	1.520	1.135	28.830	70	710
P35M5	4	4	259/28	.060	1.520	1.275	32.390	60	916

1-800-945-5542