


Little Rock **Virginia Beach**
800-945-5542 757-361-0207

Baton Rouge **Las Vegas**
888-754-5707 702-696-0001

Houston **Kentucky**
888-388-6280 859-727-6100



www.prioritywire.com

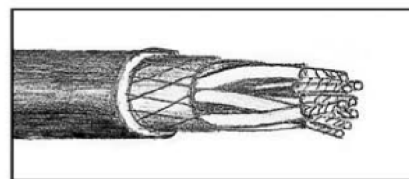

TYPES SJTO AND STO PORTABLE CORD 60°C 300 and 600 Volt UL

Application: For use with portable tools, motors, floor maintenance equipment, hospital and sound equipment, washing machines, portable lights, lamps and similar equipment.

Specifications: • **Conductors:** Fully annealed, stranded bare copper, per ASTM B-174, sizes 18 - 6 AWG

• **Insulation:** Premium grade color coded PVC • **Jacket:** PVC gray or yellow • **Temperature Rating:** -20°C to + 60°C

• **Voltage Rating:** Type SJTO – 300 volts Type STO – 600 volts • **Oil resistant jacket** • **Resists:** oils, water, acids, alkalies, ozone

• **UL Flexible Cord Subject 62** • **OSHA acceptable, MSHA approved (where applicable)**

Color Code:	No. of Conductors	Color
	2	Black, White
	3	Black, White, Green
	4	Black, White, Red, Green

Catalog No.	No. of Conductors	AWG	Conductor Strand	Nominal Insulation Thickness		Nominal Overall Diameter		Current Amps	Weight LBS/M'
				Inches	mm	Inches	mm		
UL Type SJTO - 300 Volt									
P01M6	2	18	16/30	.030	.76	.290	7.37	10	48
P02M6	3	18	16/30	.030	.76	.320	8.13	10	64
P03M6	4	18	16/30	.030	.76	.335	8.51	7	78
P04M6	2	16	26/30	.030	.76	.320	8.13	13	64
P05M6	3	16	26/30	.030	.76	.345	8.76	13	83
P06M6	4	16	26/30	.030	.76	.385	9.78	10	94
P07M6	2	14	41/30	.030	.76	.345	8.76	18	80
P08M6	3	14	41/30	.030	.76	.365	9.27	18	106
P09M6	4	14	41/30	.030	.76	.415	10.54	15	120
P10M6	2	12	65/30	.030	.76	.415	10.54	25	135
P11M6	3	12	65/30	.030	.76	.430	10.92	25	162
P12M6	4	12	65/30	.030	.76	.480	12.19	20	212
P13M6	2	10	104/30	.045	1.14	.560	14.22	30	195
P14M6	3	10	104/30	.045	1.14	.600	15.24	30	231
P15M6	4	10	104/30	.045	1.14	.650	16.51	25	290
UL Type STO - 600 Volt									
P16M6	2	18	16/30	.030	.76	.345	8.76	10	56
P17M6	3	18	16/30	.030	.76	.365	9.27	10	80
P18M6	4	18	16/30	.030	.76	.390	9.91	7	92
P19M6	2	16	26/30	.030	.76	.370	9.40	13	78
P20M6	3	16	26/30	.030	.76	.390	9.91	13	94
P21M6	4	16	26/30	.030	.76	.415	10.54	10	110
P22M6	2	14	41/30	.045	1.14	.500	12.70	18	133
P23M6	3	14	41/30	.045	1.14	.530	13.46	18	158
P24M6	4	14	41/30	.045	1.14	.570	14.48	15	188
P25M6	2	12	65/30	.045	1.14	.575	14.61	25	177
P26M6	3	12	65/30	.045	1.14	.600	15.24	25	211
P27M6	4	12	65/30	.045	1.14	.650	16.51	20	260
P28M6	2	10	104/30	.045	1.14	.625	15.88	30	217
P29M6	3	10	104/30	.045	1.14	.655	16.64	30	272
P30M6	4	10	104/30	.045	1.14	.710	18.03	25	330
P31M6	3	8	133/29	.060	1.520	.874	22.20	40	415
P32M6	4	8	133/29	.060	1.520	.965	25.02	35	550
P33M6	3	6	133/27	.060	1.520	.972	24.69	55	590
P34M6	4	6	133/27	.060	1.520	1.100	27.49	45	760

* Standard Packaging: 250 ft., 500 ft., 1000 ft.

** Other put ups available on special order.

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003