


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

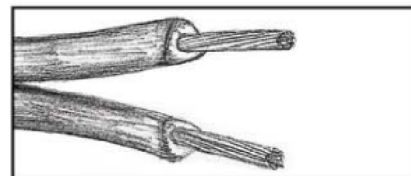

www.prioritywire.com

LAMP CORD UL TYPE SPT 300 Volt, 60°C

Application: For use in small appliances, lamps, radio equipment, and malibu lighting.

Specifications: • Conductor: Stranded bare copper • Insulation: PVC

Options: Standard colors available

UL labels: CSA available where applicable

105°C material available

Catalog No.	Size AWG	No. of Conductors	Conductor Strand	Nominal Wall	Nominal Overall Diameter	AMPS	Weight LBS/M
SPT - 1							
P01M7	18	2	41/34	.030	.11 x .21	10	20
P02M7	18	3	41/34	.030	.11 x .31	10	22
SPT - 2							
P03M7	18	2	41/34	.045	.14 x .27	10	27
P04M7	16	2	65/34	.045	.16 x .30	13	38
P05M7	16	3	65/34	.045	.16 x .37	10	58
SPT - 3							
P06M7	16	2	65/34	.045	.16 x .37	10	58
P07M7	14	2	41/30	.060	.23 x .43	18	74
P08M7	14	3	41/30	.060	.23 x .51	15	93
P09M7	12	2	65/30	.060	.29 x .50	25	116
P10M7	12	3	65/30	.060	.29 x .60	20	128

* Put Ups: 250' Spools

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003