

Little Rock
800-945-5542

Virginia Beach
757-361-0207

Baton Rouge
888-754-5707


Las Vegas
702-696-0001

Houston
888-388-6280

Kentucky
859-727-6100



www.prioritywire.com

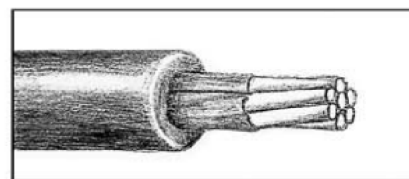

AIRPORT LIGHTING CABLE

FAA L-824 Type C 5000 Volts Unshielded 90°

Application: Suitable for installation in conduit, ducts or direct burial, for use in airport lighting circuits and control circuits.

Specifications: • **Conductor:** Single conductor cable, stranded, soft annealed bare copper, sizes 8 - 4 AWG

• **Insulation:** Cross-linked polyethylene (XLP) 5000Volts • FAA L-824 Type C • ASTM B-3 and B-8

• ICEA S-66-524 Paragraph 3.7 (XLP) and ICEA S-66-524 Table 7-29 (Thickness)

Catalog No.	Size AWG	Stranding	Nominal Overall Diameter (Inches)	Insulation Thickness (Mils)	Weight per 1000' (lbs)
P01013	8	7	.380	110	95
P02013	6	7	.415	110	130
P03013	4	7	.465	110	185

1-800-945-5542