


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

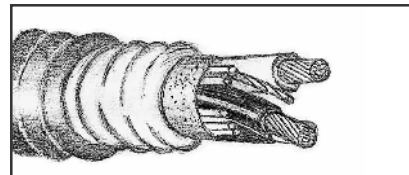

THREE-CONDUCTOR TECK-90 C.S.A. (XLPE) 1000 Volt 90°C, -40°C

Catalog No.	Conductor Size		Insulation Thickness	Inner Jacket Thickness	Approximate Diameters			Approximate Weight Aluminum Armor
	Power AWG or kcmil	Ground AWG			Inner Jacket	Armor	Outer Jacket	
P01P13	8	10	.045"	.060"	.72"	.92"	1.03"	486 lbs/kft
P02P13	6	8	.060"	.060"	.89"	1.11"	1.23"	741 lbs/kft
P03P13	4	8	.060"	.080"	.92"	1.14"	1.26"	944 lbs/kft
P04P13	3	6	.060"	.080"	1.11"	1.33"	1.32"	1161 lbs/kft
P05P13	2	6	.060"	.080"	1.05"	1.27"	1.38"	1272 lbs/kft
P06P13	1	6	.080"	.080"	1.20"	1.42"	1.54"	1556 lbs/kft
P07P13	1/0	6	.080"	.080"	1.28"	1.50"	1.62"	1809 lbs/kft
P08P13	2/0	6	.080"	.080"	1.37"	1.60"	1.73"	2151 lbs/kft
P09P13	3/0	4	.080"	.080"	1.47"	1.70"	1.83"	2590 lbs/kft
P10P13	4/0	4	.080"	.080"	1.59"	1.84"	1.98"	3205 lbs/kft
P11P13	250	4	.090"	.110"	1.79"	2.04"	2.18"	3825 lbs/kft
P12P13	300	4	.090"	.110"	1.90"	2.15"	2.29"	4378 lbs/kft
P13P13	350	3	.090"	.110"	2.00"	2.25"	2.39"	4965 lbs/kft
P14P13	400	3	.090"	.110"	2.10"	2.35"	2.52"	5586 lbs/kft
P15P13	500	2	.090"	.110"	2.26"	2.51"	2.69"	6701 lbs/kft
P16P13	600	2	.090"	.110"	2.44"	2.69"	2.86"	7795 lbs/kft
P17P13	750	2	.090"	.110"	2.64"	2.89"	3.07"	9391 lbs/kft
P18P13	1000	1	.090"	.140"	3.02"	3.27"	3.47"	12315 lbs/kft
P19P13	1250	1/0	.110"	.140"	3.54"	3.79"	3.99"	15358 lbs/kft
P20P13	1500	1/0	.110"	.140"	3.80"	4.05"	4.25"	17964 lbs/kft

* Shipping Tolerances +/- 10%

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003