


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

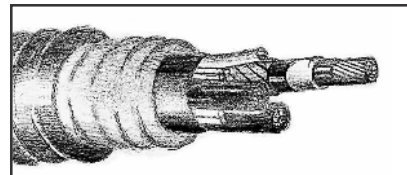

THREE-CONDUCTOR TECK-90 C.S.A. (XLPE) 5KV Shielded, Ungrounded 90°C, -40°C

Catalog No.	Conductor Size		Inner Jacket Thickness	Approximate Diameters			Approximate Weight Aluminum Armor
	Power AWG or kcmil	Ground AWG		Inner Jacket	Armor	Outer Jacket	
133% Insulation Level and .215" Insulation Thickness							
P01P15	2	6	.110"	2.00"	2.30"	2.45"	3050 lbs/kft
P02P15	1	6	.110"	2.14"	2.39"	2.56"	3153 lbs/kft
P03P15	1/0	6	.110"	2.22"	2.47"	2.64"	3462 lbs/kft
P04P15	2/0	4	.110"	2.30"	2.55"	2.73"	3833 lbs/kft
P05P15	3/0	4	.110"	2.41"	2.66"	2.83"	4346 lbs/kft
P06P15	4/0	4	.110"	2.52"	2.77"	2.94"	4901 lbs/kft
P07P15	250	4	.110"	2.62"	2.86"	3.04"	5393 lbs/kft
P08P15	300	4	.110"	2.73"	2.98"	3.16"	6004 lbs/kft
P09P15	350	3	.110"	2.83"	3.08"	3.26"	6643 lbs/kft
P10P15	400	3	.110"	2.92"	3.17"	3.37"	7305 lbs/kft
P11P15	500	2	.140"	3.15"	3.40"	3.60"	8704 lbs/kft
P12P15	600	2	.140"	3.35"	3.60"	3.80"	9942 lbs/kft
P13P15	750	2	.140"	3.55"	3.80"	4.00"	11657 lbs/kft
P14P15	1000	1	.140"	3.87"	4.12"	4.32"	14518 lbs/kft

* Shipping Tolerances +/- 10%

1-800-945-5542

© Priority Wire & Cable, Inc. Little Rock, AR, 2003 PWC02/2003