


Mini-Split Cable

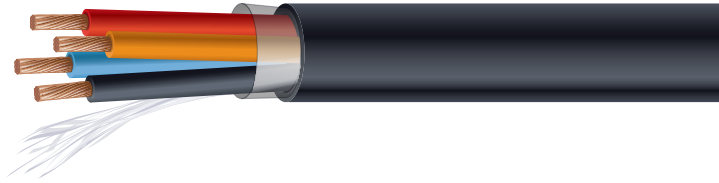

APPLICATION:

Designed for installing ductless mini-split air conditioning systems. It is direct burial approved with a PVC jacket, is sunlight resistant and can be installed in wet or dry locations or areas. Rated for 600 volts and can also be used for power, control, signal, communication and lighting circuits in commercial and industrial environments. Suitable for installation in conduits and ducts.

CONSTRUCTION:

Bare copper Class B stranded conductors. Heat and moisture resistant PVC/Nylon Insulation. Type THHN/THWN-2. Flame and sunlight resistant black PVC jacket rated 90°C wet or dry.

STANDARDS:

- UL 1277
- UL 1685 and IEEE 383 70,000 BTU Vertical Flame Test
- UL Listed to IEEE 1202 and CSA FT4 70,000 BTU Flame Test
- UL Listed as TC-ER-JP (Joist Pull)
- RoHS Compliant
- Approved for Class 1 or 2, Division 2 industrial hazardous locations per NEC
- ICEA S-95-658, ICEA S-73-532
- UL 62, UL 66, UL 83, UL1277

Part Number	Conductor Size	No. of Conductors	Jacket Thickness	Overall Diameter	Net Weight	Spool Length
	AWG		inches	inches	lbs/kft	feet
P125682-04-09	14	4	0.045	0.366	107	250
P125682-05-09	14	4	0.045	0.366	107	500
P125682-06-09	14	4	0.045	0.366	107	1000
P125682-99-09	14	4	0.045	0.366	107	BULK