




PRIORITY-**T**-LIGHT™

12/3 SJTW Temporary Lighting String

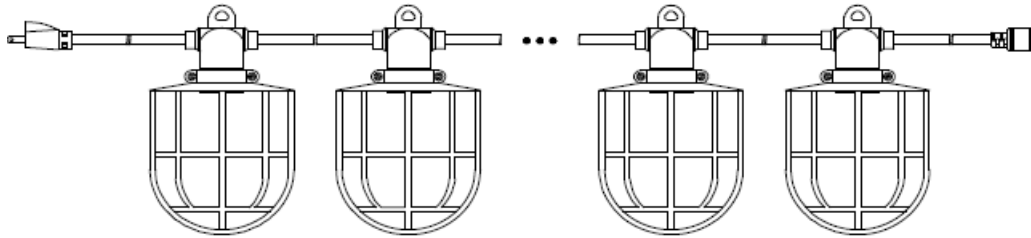

*Note: Plug and connector style may vary.

Description:

Temporary lighting string, with molded lamp holders attached to a 12/3 SJTW flexible cord; for use as temporary indoor and outdoor lighting in accordance with NEC requirements.

Approvals:

UL Listed; and meets OSHA and NEC requirements.

Construction Parameters:

- **Conductor:** 12 AWG, 65/30 stranded bare copper
- **Insulation and Jacket Material:** PVC
- **Jacket Color:** Yellow
- **Lamp holder Spacing (nom):** 10 feet, starting 9 ft. from the plug.
- **Lamp Holder Molding Compound:** High Temp PVC, Black.
- **Plug and Connector Material:** PVC

Electrical Properties:

- **Temperature Rating:** -40° to +60°C
- **Nominal Operating Voltage:** 125 VAC
- **Lamp Type:** 150W (max), A-23 or larger.
- **Maximum String Wattage:** 1875W (NEMA 5-15) or 2500W (NEMA L5-20)

Item	Cord Length	Lamp Holders	Light Guard	Color:	Coleman Equivalent
12/3 SJTW	50'	5	Plastic	Yellow	7548
12/3 SJTW	100'	10	Plastic	Yellow	7549

Revision Date: N/A

Revision # 0

Approved by: Brian Yu

Signature

Date: 04/08/14