


Little Rock **Virginia Beach**
800-945-5542 **757-361-0207**

Baton Rouge **Las Vegas**
888-754-5707 **702-696-0001**

Houston **Kentucky**
888-388-6280 **859-727-6100**

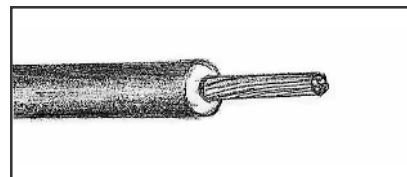

EXTRA FLEXIBLE AND STANDARD LARGE MTW/TEW (TINNED COPPER)

Application: • Polyvinylchloride (PVC) Machine Tool Wire, (MTW)/Thermoplastic Equipment Wire (TEW) (90°C MTW) (UL & CSA 105°C)(VW-1 & Moisture Resistant)(600volts). Can be used for control cabinets, internal wiring or appliances and for machine tools.

Specifications: • #6 - 4/0 flexible MTW/TEW includes THHW, boat cable BC-5W2, SAE J 1127 Type SGT, UL 10269 - 1000 volts. • 1/0 - 750 MCM is CT (cable tray) rated. • We can stripe, print or respool to your customized specifications. • Buy standard put-ups or multiples of standard put-ups for quicker delivery.
• All sizes stocked in Black and Red. 8, 6, 4 & 2 stocked in various other colors. • Consult your salesperson for availability. Other colors available upon special request.

Catalog No.	AWG Size	Conductor Stranding	Nominal Insulation	Nominal Diameter	Apprpx. Lbs/Mft.	UL Style
P0114	8	19/.0295 tinned	.047	.240	70	1028/1231/1344
P0214	8	133/29 tinned	.048	.270	77	1028/1231/1344
P0314	6	19/.0372 tinned	.062	.320	108	1232/1283/1346
P0414	6	259/30 tinned	.062	.326	117	1232/1283/1346/10269
P0514	4	19/.0469 tinned	.062	.360	161	1232/1283/1346
P0614	4	420/30 tinned	.062	.378	175	1232/1283/1346/10269
P0714	2	19/.0591 tinned	.064	.411	241	1232/1283/1346
P0814	2	665/30 tinned	.064	.456	263	1232/1283/1346/10269
P0914	1	836/30 tinned	.085	.530	347	1232/1284/1338/10269
P01014	1/0	1045/30 tinned	.082	.574	419	1232/1284/1338/10269
P01114	2/0	1330/30 tinned	.082	.620	534	1232/1284/1338/10269
P01214	3/0	1672/30 tinned	.085	.680	672	1232/1284/1338/10269
P01314	4/0	2109/30 tinned	.082	.739	819	1232/1284/1338/10269
P01414	250 MCM	2499/30 tinned	.100	.887	978	1284/1339
P01514	350 MCM	3458/30 tinned	.100	1.045	1550	1284/1339
P01614	400 MCM	4123/30 tinned	.098	1.160	1475	1284/1339
P01714	500 MCM	5054/30 tinned	.130	1.275	1968	1284/1339
P01814	750 MCM	7581/30 tinned	.115	1.380	2853	1284/1340

1-800-945-5542